
MAINGUARD NO 79 BLOWOFF HYDRANT

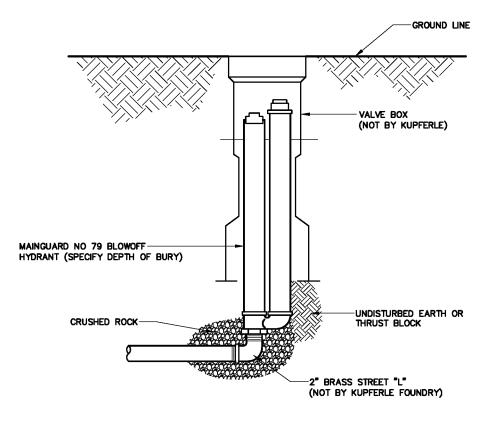

BLOWOFF HYDRANTS SHALL BE NON-FREEZING, SELF DRAINING TYPE, WITH AN OVERALL LENGTH OF 4'. SET UNDERGROUND IN A 5 1/4" VALVE BOX, THESE HYDRANTS WILL BE FURNISHED WITH A 2" FIP INLET, A NON-TURNING OPERATING ROD, AND SHALL OPEN TO THE LEFT. ALL OF THESE WORKING PARTS SHALL BE OF BRONZE-TO-BRONZE DESIGN, AND BE SERVICEABLE FROM ABOVE GRADE WITH NO DIGGING. THE OUTLET SHALL BE A 2" FIP COUPLING WITH PLUG, AS MANUFACTURED BY KUPFERLE FOUNDRY CO, ST. LOUIS, MO, OR APPROVED EQUAL.

(SPECIFY OVERALL LENGTH 6" SHORTER THAN NORMAL DEPTH OF BURY.)

DENVER WATER 1800 West 12th Avenue Denver, Colorado 80204 Phone(303)628–6000 Telecopier No.(303)628–60	151
STANDARD DESIGN FOR BLOWOFF HYDRANT	
Scale: _ NONE	Date: <u>MAY 2000</u>
Drawn: _ C.B.B Tr:	Ck:
Approved: Dr127_No35	

REVISED 2004 SHEET 84